


Wet abrasion scrub tester

This instrument is used to test the abrasion, scrub and washability performance of many materials, as well as perform the abrasion scrub test in wet and dry condition, in a repeatable, controlled condition to simulate everyday use or wear patterns. Also detergent performance can be determined. It is widely used in the water-based coating field, but also suitable for testing paints, coatings, leather, wood, plastic, printing materials, fibre, etc.

Various brushes, pads and sponges available according to the ISO, DIN and ASTM standards

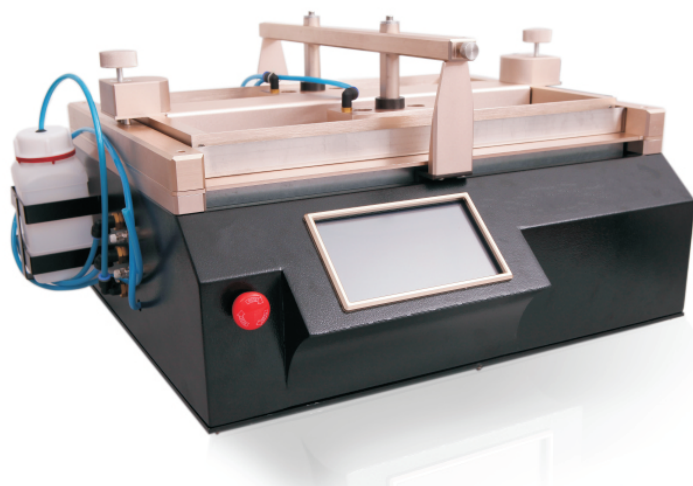

Features

- Two brush holders for side by side testing
- Large lcd with touch-screen operation
- Test fluid flow controlled by a peristaltic pump

Technical details

Scrub rate	37 ± 1 /min
Abrasion	0-9999 cycles
Sample	≤ 25 mm thickness
Mains	220 V/50 Hz

Standards

ISO 11998 · EN 13300 · DIN 53778 · BS 3900 · ASTM D2486 · ASTM D3450